

Helsinki 26.7.2001

#3 D. 11-9-01
Priority Papers
J1002 U.S. PTO
09/960422
09/21/01

ETUOIKEUSTODISTUS
PRIORITY DOCUMENT



Hakija
Applicant

Nokia Mobile Phones Ltd.
Espoo

Patenttihakemus nro
Patent application no

20002123

Tekemispäivä
Filing date

27.09.2000

Kansainvälinen luokka
International class

H01Q

Keksinnön nimitys
Title of invention

"Antenna arrangement in a mobile station"
(Matkaviestimen antennijärjestely)

Täten todistetaan, että oheiset asiakirjat ovat tarkkoja jäljennöksiä patentti- ja rekisterihallitukselle alkuaan annetuista selityksestä, patenttivaatimuksista, tiivistelmästä ja piirustuksista.

This is to certify that the annexed documents are true copies of the description, claims, abstract and drawings originally filed with the Finnish Patent Office.

Eija Solja
Eija Solja
Apulaistarkastaja

Maksu 300,- mk
Fee 300,- FIM

Osoite: Arkadiankatu 6 A Puhelin: 09 6939 500 Telefax: 09 6939 5328
P.O.Box 1160 Telephone: + 358 9 6939 500 Telefax: + 358 9 6939 5328
FIN-00101 Helsinki, FINLAND

Antenna arrangement in a mobile station

Matkaviestimen antennijärjestely

Antenna-anordning i en mobil station

The invention concerns generally the technological field of antenna arrangements and EMC (ElectroMagnetic Compatibility) arrangements in mobile stations. Especially the invention concerns decreasing effects of RF radiation of the antenna in electronics of mobile stations. The invention also concerns a mobile station
5 equipped with such an antenna arrangement.

The evolution of smaller and smaller mobile telephones and other portable radio receivers and transceivers wirelessly communicating personal digital assistants has also promoted the need for antennas that do not protrude outside the smooth contours of the device. However, having the antenna inside the housing of the
10 mobile station easily causes interference problems between the antenna and other electronics of the mobile station.

Figure 1 illustrates a cross section of a typical mobile station according to the prior art. The mobile station 100 has a helix antenna 101 which is connected to the printed wired board 103 together with other electronics 102. The battery 105 of the
15 mobile station forms a part of the housing 104. On the front side of the mobile station there is a microphone 106, keyboard 107, display unit 108 and earpiece 109.

Patent document [1] US 5 787 340 discloses an arrangement where a shielding layer is located beside the user and an antenna. Such a shielding layer is illustrated in Figure 1 as 120. A similar solution is also disclosed in article [2] "Reduction of
20 SAR in Human Head by Suppression of Surface Currents due to a Portable Telephone" by J. Wang and O. Gujiwara, IEICE Trans. Commun., vol. E80-B, pp. 1810-1815. This article discloses an arrangement with low reluctance ferrite sheet disposed on the housing of a portable telephone. These prior art methods can be used also for reducing interference of RF fields to the handset. However, while the
25 part of the RF radiation is absorbed with the additional shield, a portion of the RF intensity is lost, which means that the efficiency of the antenna may not be optimal. This problem is partially solved in a solution disclosed in patent document US 5 507 012 where reflecting material is used in addition to an absorbing RF shield. This solution, however, is relatively complicated and therefore it is not well suited for
30 mass production. A further disadvantage with these prior art solutions is their limitation to devices where the antenna is located outside the housing of the mobile

station. Except the antenna, also the shield is visible and makes a negative effect on the appearance and usability of the mobile station. If the antenna would be placed inside the housing there could be interference problems between the antenna and other electronics of the device.

- 5 Patent document [3] US 5 982 335 discloses a a microstrip antenna with a ground plane, microstrip radiator and a substrate disposed between the radiator and the ground plane. Theory of microstrip antennas is also described in [4] "Small Antennas" ISBN 086380 048 3, pages 138-165.

10 The arrangement described in US 5 982 335 includes low magnetic reluctance material on the surface of the ground plane. The purpose of the low magnetic reluctance material is thus to influence the radiation pattern of the antenna. It would be possible to use this kind of microstrip antenna inside a mobile station, but there are certain drawbacks related with this prior art solution as well.

15 Firstly, the dielectric substrate of a microstrip antenna takes a lot of space within the housing of the mobile station, and therefore the size of the housing would become too large, or the space available for other electronics would become too small. Another drawback is the fact that while the antenna would be located just next to the electronics circuits, the radiation of the antenna could cause RF interference to the electronics. The low magnetic reluctance material on the surface of the ground plane
20 affects the radiation pattern of the antenna by, for example, attenuating the radiation intensity in the direction opposite to the radiator. However, a microstrip antenna tends to cause high radiation intensity in small areas in the nearest surrounding area of the antenna.

25 A further drawback is related to the fact that it is difficult to connect a microstrip antenna to the RF electronics of a mobile station. The antenna element must first be equipped with connecting wires, next the printed wired board must and the antenna element must be installed within the housing, and finally the antenna wires must be soldered to the printed wired board. It is quite difficult to arrange these production phases within an automated production line, and thus manual assembly work may be
30 required.

It is an object of the present invention to provide an antenna arrangement with which the disadvantages of prior art solutions would be reduced or avoided. It is especially an object of the present invention that an optimal electromagnetic

compatibility would be achieved with an antenna structure and overall assembly that is applicable to large scale mass production of mobile stations.

One idea of the present invention is providing a planar antenna in which the PWB of the mobile station is used. The planar antenna has preferably an air gap between the radiator plate and the ground plane. In order to reduce the effects of the RF currents in phone circuitry there is also a sheet of low reluctance material for absorbing the RF radiation. The sheet of low reluctance material is so located that it covers an area of the printed wired board which is not covered by the radiator element or the ground plane of the planar antenna. Preferably the low reluctance material covers a high RF intensity area on the printed wired board. This means that the low reluctance material is placed on side of the planar antenna. The low reluctance material is also preferably located at least partly at the same area of the printed wired board as the display unit of the mobile station, such as between the display unit and the printed wired board. The low reluctance material is preferably ferromagnetic material, such as flexible sheet of ferromagnetic material, and it is may be attached to the display unit or on the PWB.

The present invention has several important advantages over the prior art solutions. With the present invention it is possible effectively reduce the interference of the antenna's RF radiation to other electronics of a mobile station, because the low reluctance material effectively reduces the RF currents on the surface of the printed wired board. The antenna arrangement also has a radiation pattern that directs the radiation away from the user and thus makes the antenna efficiency high.

As the antenna is constructed above the printed wired board it is possible to use the antenna area of the PWB also for other electronic components and/or wiring. Therefore it is possible to make the size of the mobile station very small. Many possibilities are available for attaching the ferromagnetic sheet to the display unit or the PWB, because the attachment means do not affect the performance of the antenna. Advantages can be achieved by locating the low reluctance material at least partly between the display unit and the printed wired board. The area of the display unit is relatively large and therefore it is possible to place a ferromagnetic sheet with large area below the display unit. The wiring between the display unit and the PWB can be arranged to the edge of the display unit, and therefore the ferromagnetic sheet can be uniform. On the whole, the arrangement according to the present invention is extremely well suited for mass production, because all assembly phases can be provided on a single PWB assembly line.

The antenna arrangement of a mobile station according to the invention comprises
- a planar antenna including a ground plane and a planar radiator element which is disposed substantially parallel to the ground plane, and

- 5 - a printed wired board which is located substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board.

It is characterized in that

- 10 - the arrangement comprises a layer of low reluctance material which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and
 - said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas on the printed wired board.

15

The invention applies also to a mobile station, comprising:

- a planar antenna including a ground plane and a planar radiator element which is disposed substantially parallel to the ground plane, and
20 - a printed wired board which is substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board.

The invention is characterized in that

- 25 - the mobile station further comprises a layer of low reluctance material which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and
 - said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas of the printed wired board.

- 30 When an "area" covered on the printed wired board is referred in this context, the thickness of the printed wired board is disregarded.

- 35 The novel features which are considered as characteristic of the invention are set forth in particular in the appended Claims. The invention itself, however, both as to its construction and its method of operation, together with additional objects and advantages thereof, will be best understood from the following description of specific embodiments when read in connection with the accompanying drawings.

- Fig. 1 illustrates an cross section view of a prior art mobile station,
- Fig. 2 illustrates an exemplary antenna arrangement according to the invention,
- Fig. 3 illustrates a perspective view of an exemplary antenna arrangement according to the invention,
- Fig. 4 illustrates a cross section view of a mobile station with an exemplary antenna arrangement according to the invention, and
- Fig. 5 illustrates an assembly diagram of an exemplary mobile station according to the invention.

10 Figure 1 was already described in the prior art section above.

Figure 2 illustrates a cross section of an exemplary antenna arrangement according to the present invention. It comprises a ground plane 218 on a printed wired board 234, and a radiator element 216 which is connected to the ground plane from its edge, 219. The radiator element is substantially parallel with the ground plane and the printed wired board, and there is an air gap between the radiator element and the ground plate. The feed point of the radiator element is connected with a pin 312 to a printed wire of the PWB which is further connected to RF circuits 241 such as a duplex filter etc. In this arrangement ground plate and the radiator element of the planar antenna are located at the end of a printed wired board. Further details regarding planar inverted-L or -F antennas may be found in [5] "Small Antennas" ISBN 086380 048 3, pages 116-137.

According to the present invention there is a layer of low reluctance material 245 disposed on the printed wired board 234. The low reluctance material is eg. a sheet of ferromagnetic sheet. The low reluctance material is located further from the end of the printed wired board, between a display unit and the printed wired board. The display unit comprises a light guide or element with similar functionality 208a for providing illumination, and an LCD (Liquid Crystal Display) 208b. Figure 2 also shows an area 250 where the intensity of the RF currents would be relatively high if the low reluctance material 245 according to the present invention would not be applied.

Figure 3 illustrates a perspective view of an exemplary antenna arrangement according to the present invention. In this embodiment the radiator element 316 is

connected to the ground plane 318 from its other edge 319. The Figure 3 also shows the feed pin 312. The radiator element 316 covers the same area of the printed wired board as the ground plane 318. A ferromagnetic sheet 345 is applied on the other side of the printed wired board. The ferromagnetic sheet is located between the printed wired board 334 and a light guide 308a of the display unit which also includes an LCD 308b. The ferromagnetic sheet 345 covers an area 346 of the printed wired board. In this case, the area 346 does not overlap with the area 318. Figure 3 shows an area 350 where the intensity of the RF radiation would be relatively high if the low reluctance material 345 according to the present invention would not be applied. Figure 3 also illustrates some other electronics components 342 on the PWB.

Figure 4 illustrates a cross section of an exemplary mobile station which has an antenna arrangement according to the present invention. The antenna comprises a radiator element 416 and a ground plane 418 which is made of a metal layer of the PWB. There is an air gap 417 between the radiator element and the ground plate. According to the present invention there is a sheet of ferromagnetic material 445 on the other side of the PWB. The ferromagnetic sheet is located between the display unit and the PWB. The display unit consists of a light guide 508a and an LCD 508b.

Fig. 4 also shows the cover 404, the battery 405, the microphone 406, the keyboard 407 and the earpiece and other electronic components 442 of the mobile station. These parts of the mobile station are similar to the prior art solution as illustrated in Fig. 1.

Figure 5 illustrates an assembly diagram of an exemplary mobile station according to the present invention. The planar antenna comprises a radiator 516 which is attached to the printed wired board with a plastic frame 519. The frame serves as a support and keeps the radiator element on a fixed distance from the ground plate 518.

The sheet of low reluctance material 545 is attached to the light guide 508a of the display unit using a clip 548. The clip keeps the sheet of eg. ferromagnetic sheet firmly in place. These parts are then attached to the printed wired board together with the LCD 508b by eg. using a frame 508c. There is also a transparent, protective window 508d above the display unit. Another possibility to attach the low reluctance material is attaching the sheet on the printed wired board by eg. gluing.

Fig. 5 also shows some other parts of the mobile station; keyboard 572-575, microphone 506, cover 504, battery 505 and other electronics components 542.

It is to be understood that the embodiments and variations shown and described herein are merely illustrative of the principles of this invention and that various modifications may be implemented by those skilled in the art without departing from the scope and spirit of the invention. Especially, it is to be understood that the present invention is not in any way restricted to the mentioned forms or assemblies of the illustrated devices. And even if the described embodiments have concerned a preferred embodiment of inverted-F antennas with an air gap, it is clear that the invention can be applied with any kind of planar antenna structures.

Claims

1. An antenna arrangement of a mobile station, comprising

- a planar antenna including a ground plane (218) and a planar radiator element (216) which is disposed substantially parallel to the ground plane, and

5 - a printed wired board (234) which is located substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board,

characterized in that

10 - the arrangement comprises a layer of low reluctance material (245) which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and

- said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas on the printed wired
15 board.

2. An antenna arrangement according to claim 1, **characterized** in that the low reluctance material covers a high intensity RF current area (250) on the printed wired board for reducing the RF current intensity on said area.

20 3. An antenna arrangement according to claim 1 or 2, **characterized** in that the low reluctance material is flexible ferrite sheet.

4. An antenna arrangement according to any of claims 1 - 3, wherein the mobile station includes a display unit, **characterized** in that the layer of low reluctance material is located between the display unit (208a, 208b) and the printed wired board (234).

25 5. An antenna arrangement according to claim 4, **characterized** in that the display unit comprises a light guide (208a) or element with similar function, and said layer of low reluctance material is attached to said light guide or element.

6. An antenna arrangement according to any of claims 1 - 3, **characterized** in that said low reluctance material is attached to the ground plane.

7. An antenna arrangement according to any of the preceding claims, **characterized** in that there is an air gap between the radiator element and the ground plane.

5 8. An antenna arrangement according to any of the preceding claims, **characterized** in that the ground plane is formed of a conducting layer of the printed wired board.

9. An antenna arrangement according to claim 8, **characterized** in that said the ground plane is formed of the conductive layer of the printed wired board which is nearest to the radiator element.

10 10. An antenna arrangement according to any of the preceding claims, **characterized** in that the planar antenna is located at the end of the printed wired board, and the low reluctance material is located at a distance from said end of the printed wired board.

15 11. An antenna arrangement according to any of the preceding claims, **characterized** in that said printed wired board connects said planar antenna to other electronics of the mobile station.

12. A mobile station, comprising:

- a planar antenna including a ground plane (518) and a planar radiator element (516) which is disposed substantially parallel to the ground plane, and

20 - a printed wired board (534) which is substantially parallel to said ground plane and said radiator element, wherein the ground plane covers a first area on the printed wired board and the radiator element covers a second area on the printed wired board,

characterized in that

25 - the mobile station further comprises a layer of low reluctance material (545) which layer is substantially parallel to the printed wired board and covers a third area on the printed wired board, and

30 - said layer of low reluctance material is so located that the third area on the printed wired board is at least in part outside said first and second areas of the printed wired board.

13. An antenna arrangement according to claim 12, **characterized** in that the low reluctance material covers a high intensity RF current area on the printed wired board for reducing the RF current intensity on said area.
14. A mobile station according to claim 12 or 13, **characterized** in that the low reluctance material is flexible sheet of ferromagnetic material.
15. A mobile station according to any of claims 12 - 14, wherein the mobile station includes a display unit (508a-508c), **characterized** in that the layer of low reluctance material (545) is located between the display unit and the printed wired board.
- 10 16. A mobile station according to any of claims 12-15, **characterized** in that the planar antenna is located at the end of the printed wired board, and the low reluctance material is located at a distance from said end of the printed wired board.
- 15 17. A mobile station according to any of claims 12-16, **characterized** in that said printed wired board connects said planar antenna to other electronics of the mobile station.

(57) Abstract

The invention concerns generally the technological field of antenna arrangements in mobile stations. The invention also concerns a mobile station equipped with such an antenna arrangement. One idea of the present invention is providing a planar antenna in which the printed wired board (PWB) of the mobile station is used. The planar antenna has preferably an air gap between the radiator element (216) and the ground plate (218). In order to reduce the effects of the RF fields to other phone electronics there is a sheet of low reluctance material (245) for reducing the RF fields. The sheet of low reluctance material is so located that it covers an area of the printed wired board which is not covered by the radiator element or the ground plane of the planar antenna. The low reluctance material is preferably ferrite material, such as flexible ferrite sheet, and it may be attached to the display unit (208a, 208b) or on the PWB (234).

Fig. 2

100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000

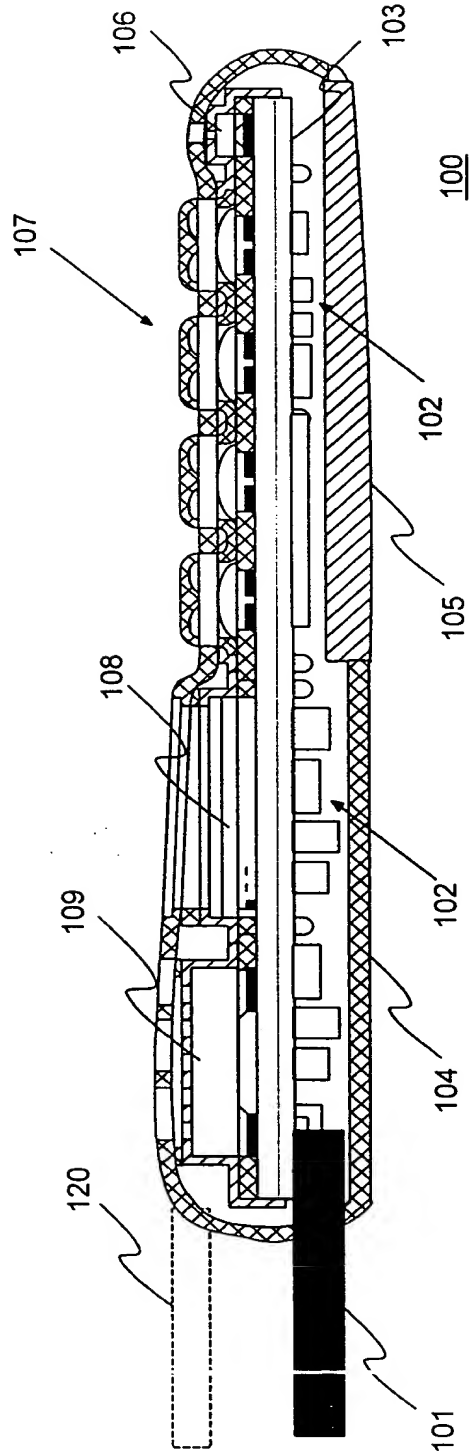


Fig. 1
PRIOR ART

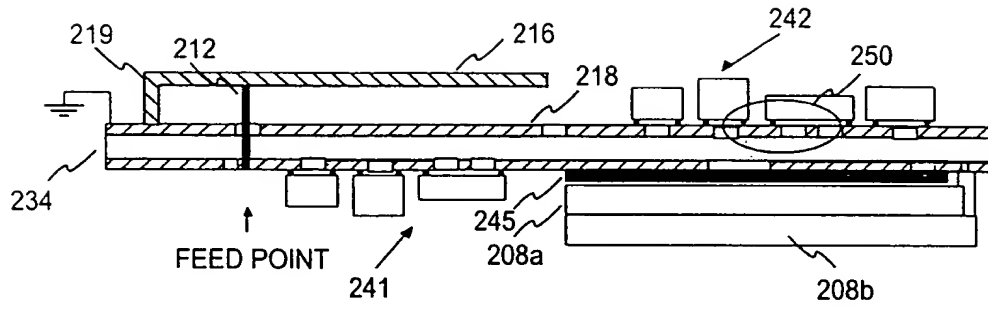


FIG. 2

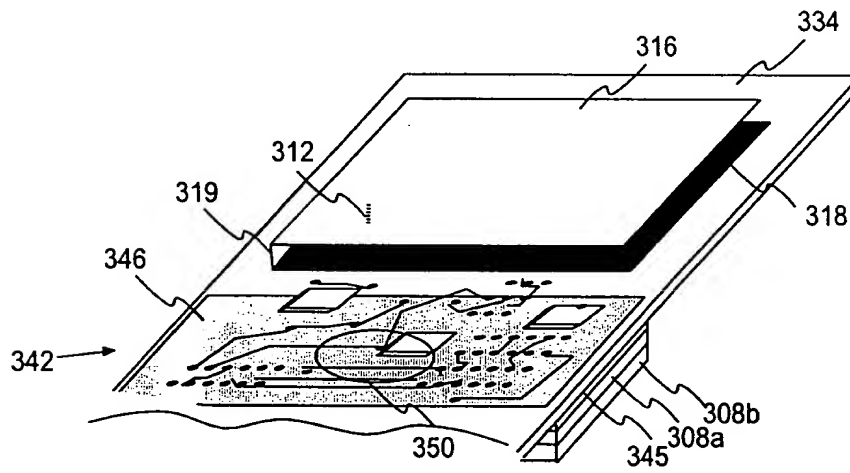


FIG. 3

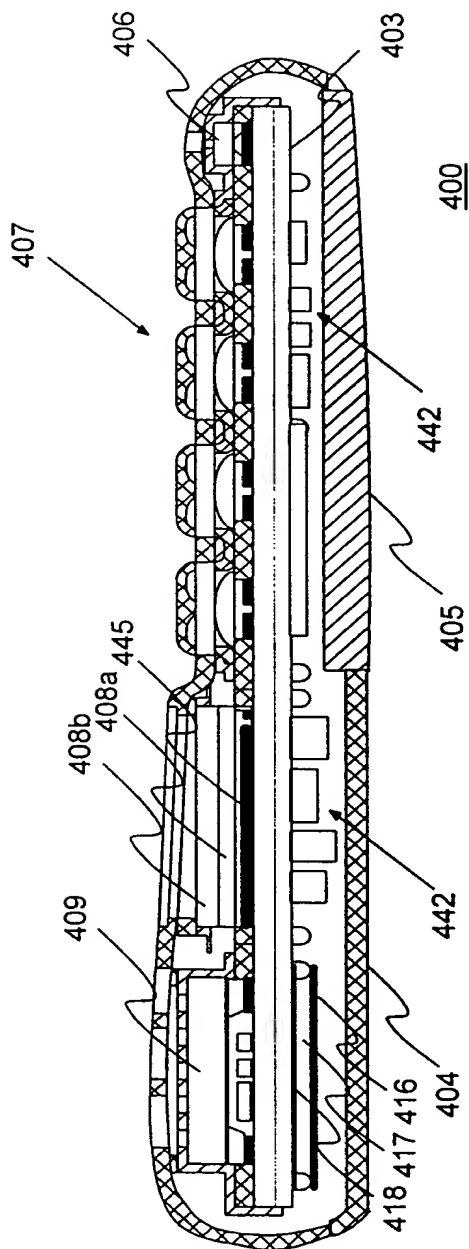


Fig. 4

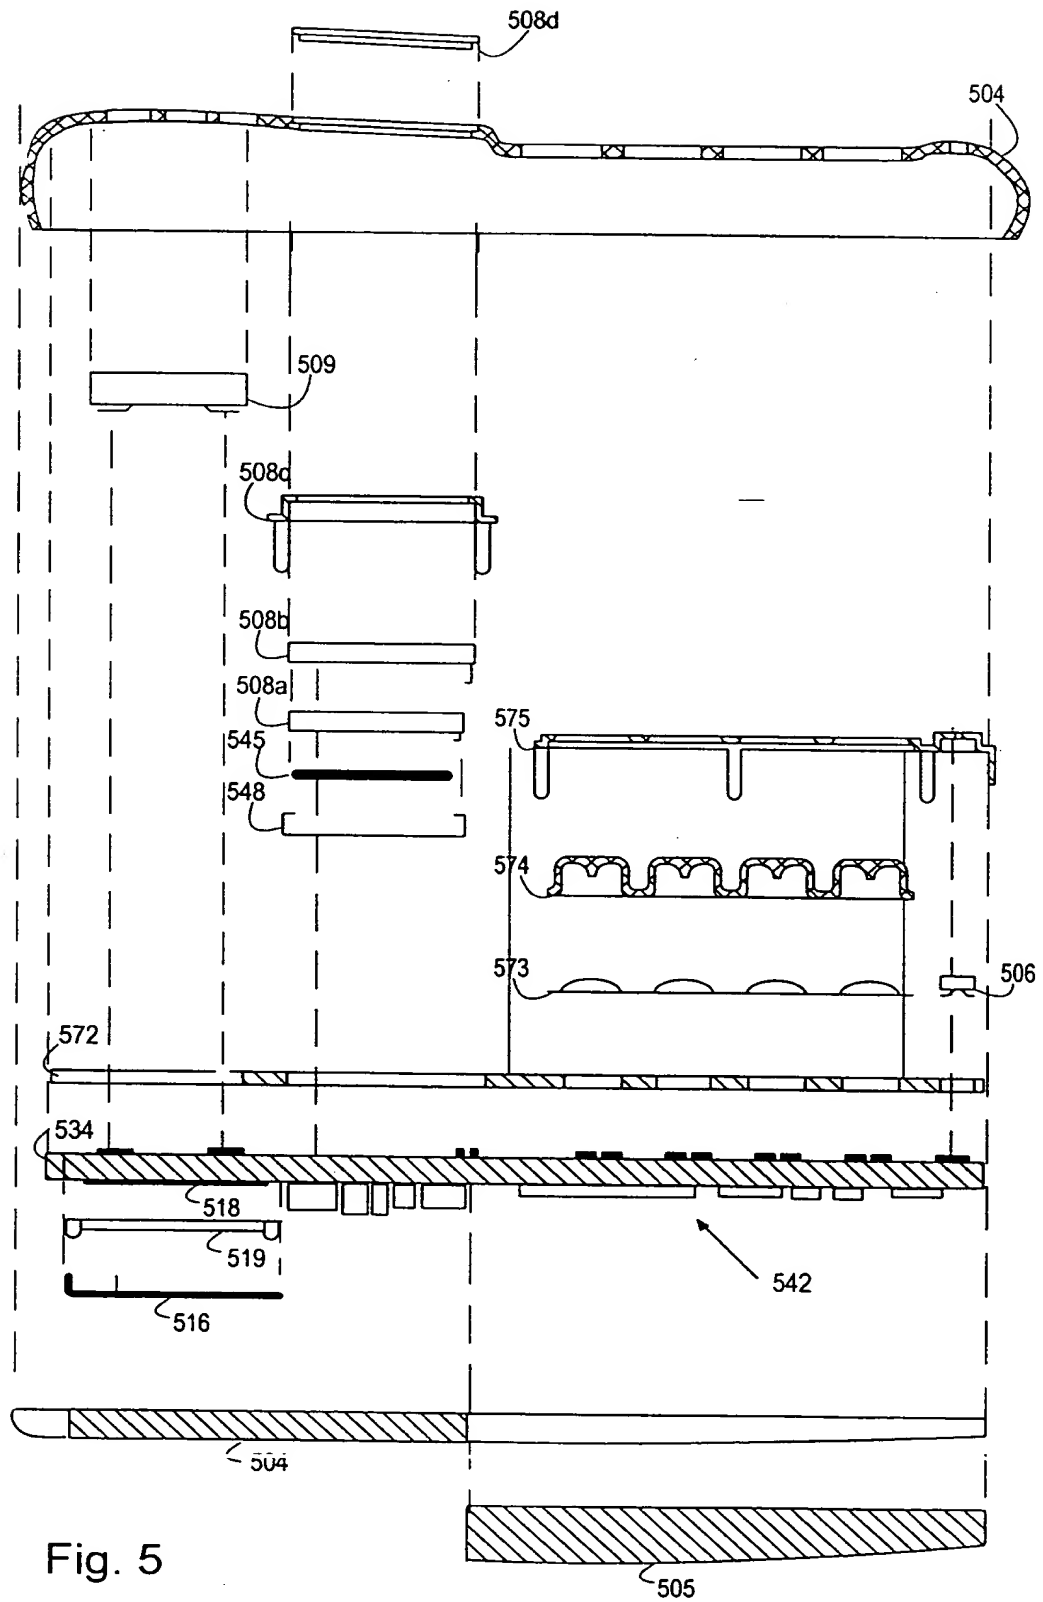


Fig. 5